
ROOFING UNDERLAY TIGHTENER



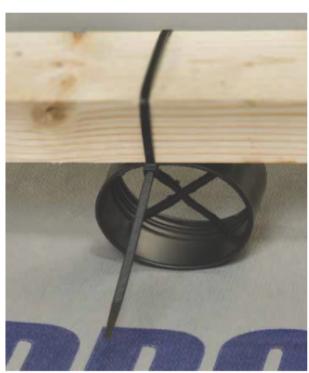

- Simple and quick to install
- Protects against wear and damage
- Prevent noise
- Avoids rainwater accumulation
- 100% water and frost resistant

The buffeting of wind against the roof can cause the underlay to flap beneath the tiles, resulting in wear to the membrane, and damage from rubbing against tile hooks and clips. Moreover, the flapping can create a significant noise issue for the building's occupants.

The Kima Underlay Tightener provides a permanent and stable solution to these problems and can be used with all types of underlay. Simple and fast to install, using a self-locking strip tie (supplied), the Tightener ensures that the underlay stays flat and that rainwater does not accumulate, but is free to run in to the gutter.



Kima Roof Accesories ApS

Grindsted Landevej 69, Eg, 7200 Grindsted, Denmark tel: +45 7533 0800

Email: mail@kimaroof.dk webpage: www.kimaroof.dk


ROOFING UNDERLAY TIGHTENER



The Kima Underlay Tightener is supplied ready to use.



Position at regular intervals between the underlay and the rafters.



Insert the self-locking striptie through the Underlay Tightener.



Pull the tie fimly to fix into position.



Image shows completed installation.

Technical data

r centificat data	
Material	EPDM rubber (elastic material)
Colour	Black
Diameter	75 mm
Width	50 mm
UV resistant	Yes
Units per box	50 pcs.



Kima Roof Accesories ApS

Grindsted Landevej 69, Eg, 7200 Grindsted, Denmark tel: +45 7533 0800

Email: mail@kimaroof.dk webpage: www.kimaroof.dk